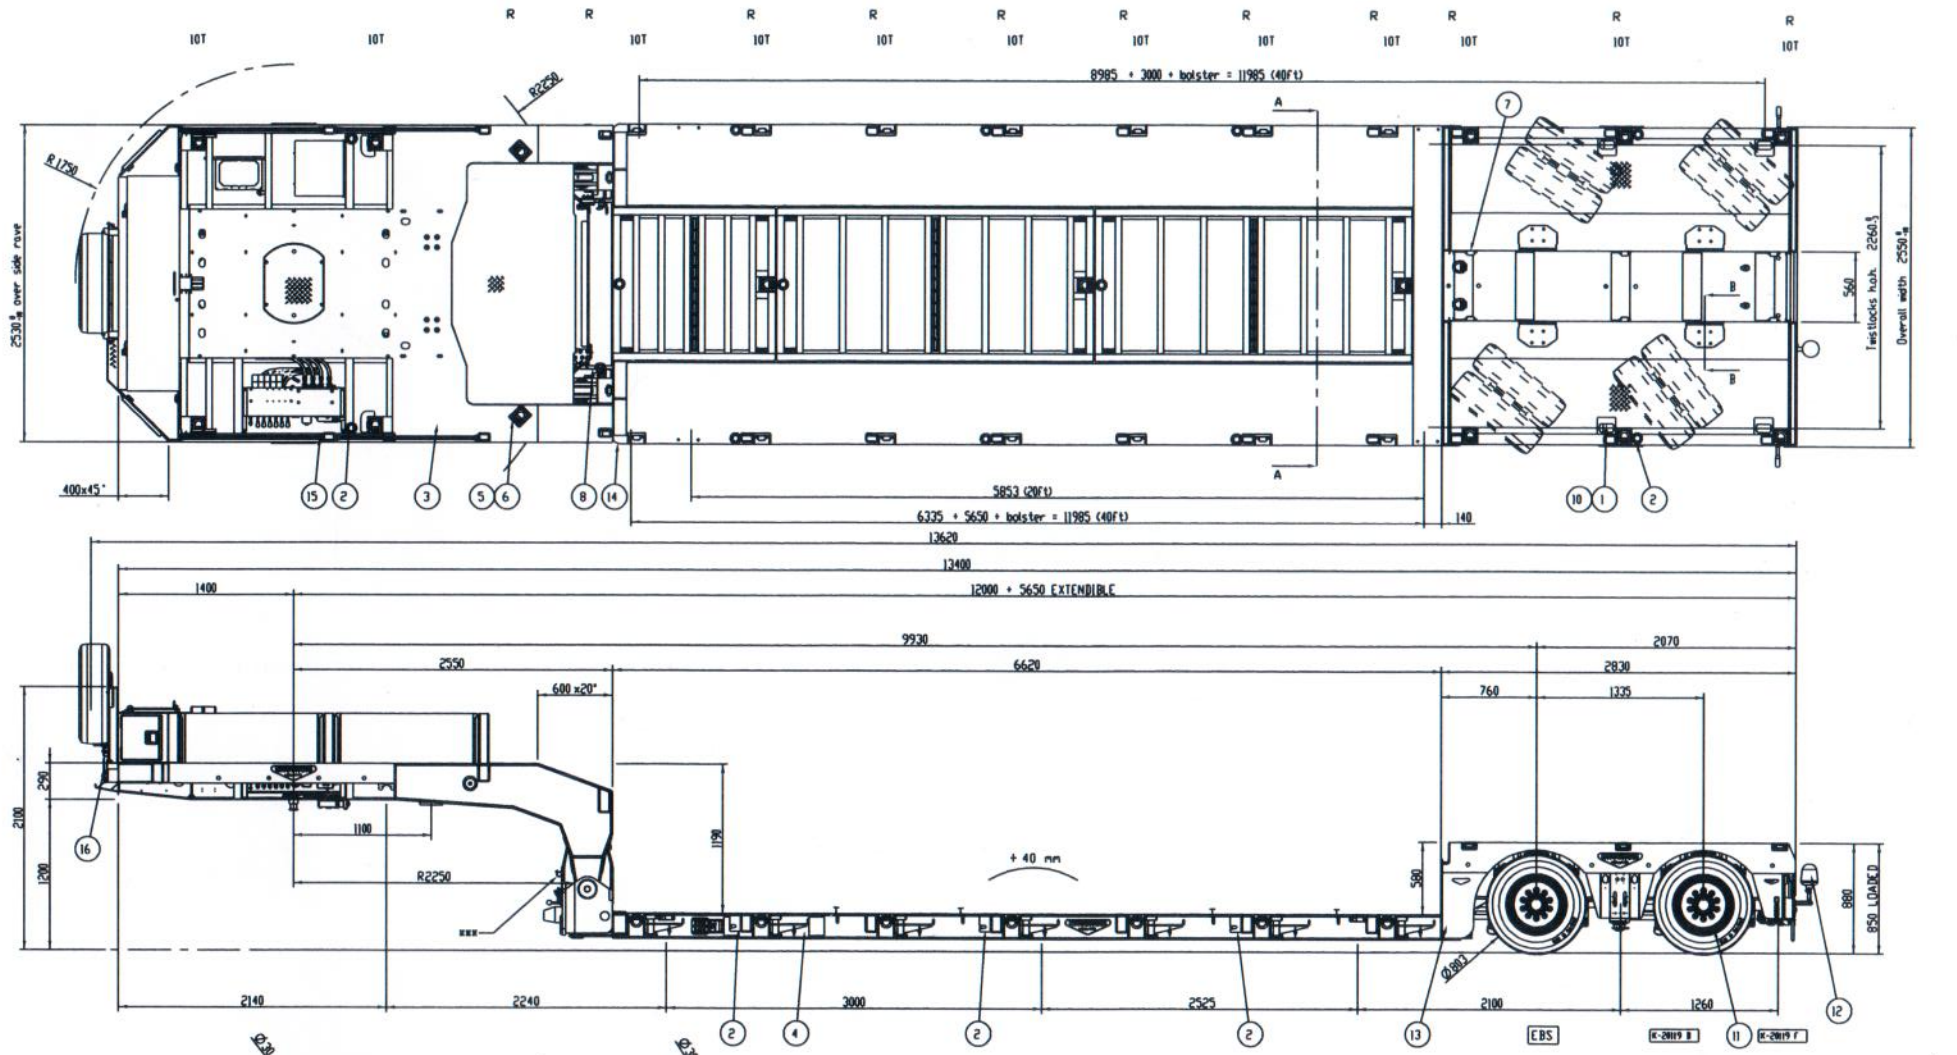

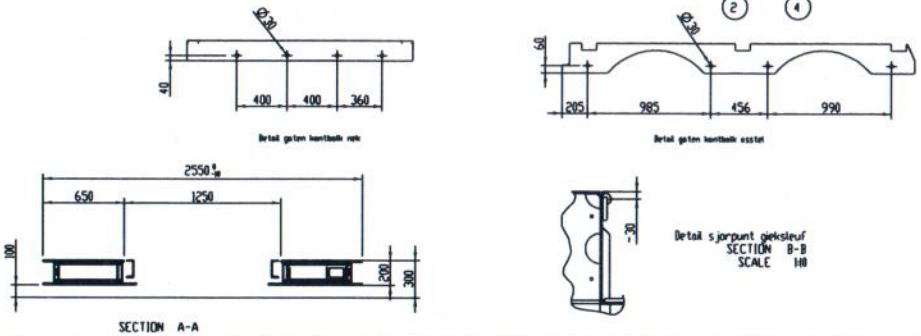

* not allowed when fully loaded. See loading advice.
LOADING OPTIONS ARE LIMITED WHEN EXTENDED. See loading advice.

Levelling valve H=880

index	qty	article number	title
16	1	A0612674 A	MONTAGEPLAAT KOPPELINGEN D=5
15	1	A0541770 A	OPTIONS & ACCESSORIES NECK
14	1	A0541720 A	2S-CHASSIS MET UITNEEMBARE VLOER LV6620
13	1	A0540000 B	ZWANEMHALS ACHTER 2S-SL
12	1	A0539959 A	VERLICHTING IN ACHTERKALF
11	1	A0533951 A	GLIJPLAAT
10	2	A0498880 A	KAP D=6
9	1	A0482230 A	AANSTURING 2ABB SL SPOORMAAT 1970
8	1	A0332410 B	MONTAGE ALU NEKSHOT
7	8	A0199642 A	SJORDOG LC 10000 KG
6	2	A0169661 A	AFDEKPLAAT SJORBAK 10T D=10
5	2	A0112609 A	SJORPOT 10000KG
4	1	A0057350 B	2S-CHASSIS LV6620+5650
3	1	A0001470 C	SAMENSTELLING AFNEEMBARE NEK LANGE SLAG
2	10	52011654 B	LAXO SOCKET TYPE 11 L=140
1	2	49554530 C	TW PLAAT UNP240 D=30

Inner beam	Suspension	Broshuis Independent	Constr. notes	xxx = K-14217
Extensions	Axles	Broshuis Independent	Side rave	UNP160 (F) UNP240 (R)
500	Raise/lower	+ 245/ -70	Stake pockets	96x66x6
1100	Tyres	245/70 R17,5	Deck	20mm (neck) / 37mm (bed) hardw.
1500	Fifth wheel load	max. 23.000 kg	Weldings	K-13320
2000	Bogie load	max. 24.000 kg	Drain holes	Ø13
2600			Type vehicle	2ABB-SL/1
3000	Client	Roth Transport AG	Chassis number	XRJ22H5UL1501104
3600	Gen. Tol. ISO 2768-c1, ISO 1101	Roughness ISO 1302, Welding ISO 13920 AC	Break sharp edges	
4000				
4500				
5000				
5650 =				

drawn by: Peter Rombouts
date: 14-Dec-2014
preceded: 1501037

BROSHUIS HOLLAND
www.broshuis.com

third angle
units: mm
scale: 1:20
sheet: 1-1
A1

mass: (for information purpose only)
treatment: -
ID: 2-2-H-245-U-L-H

title: 2 AXLE EXTENDIBLE SL LOW LOADER

state	revision	article number
Production	A	1501104